




TMR 26-6-5.0

Round Thermoelectric Module with Center Hole

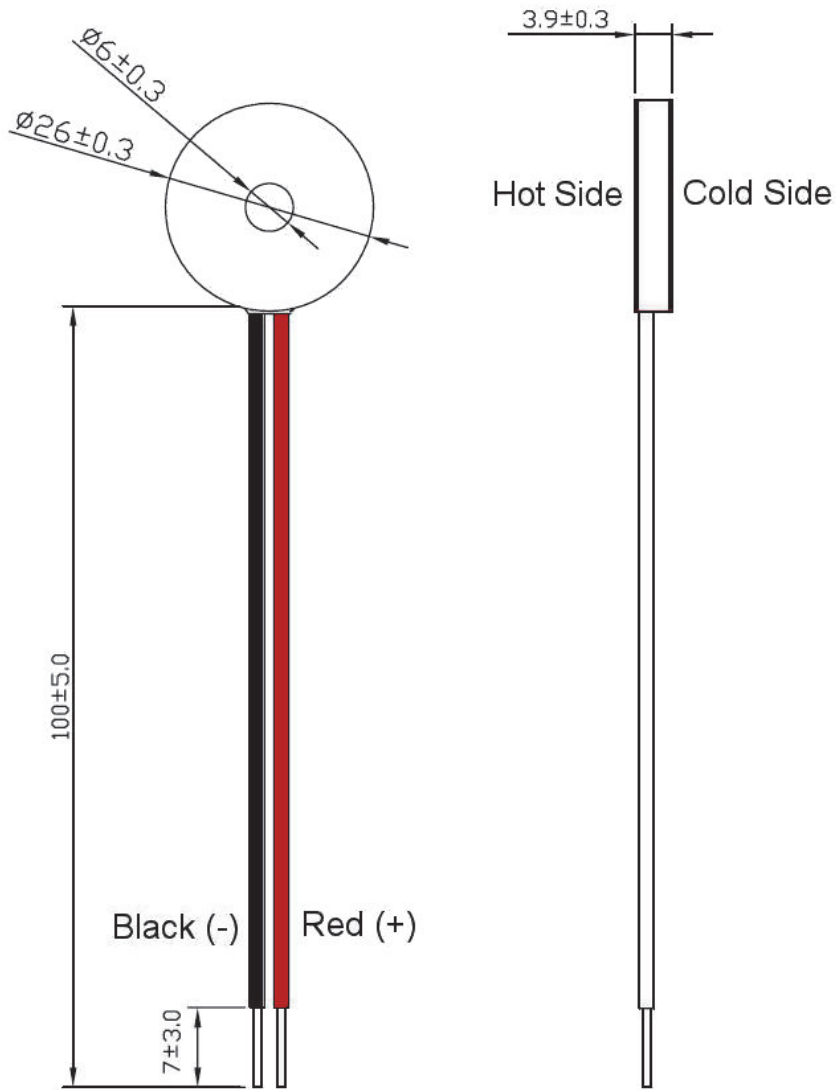

$I_{\max} = 5.0$ Amps (I_{\max} is the maximum current at ΔT_{\max})

$V_{\max} = 6.1$ Volts (V_{\max} is maximum voltage at ΔT_{\max})

$Q_{c\max} = 17.8$ Watts ($Q_{c\max}$ is maximum cooling capacity at I_{\max} , V_{\max} and $\Delta T = 0$ °C)

$\Delta T_{\max} = 68$ °C (ΔT_{\max} is maximum temperature difference at I_{\max} , V_{\max} and $Q_c = 0W$)

[TMR 26-6-5.0 Web Page Link](#)

ADVANCED THERMOELECTRIC

Toll-Free 1 (866) 665-5434

(603) 888-2467

sales@electracool.com

Copyright © 2017 Pollock Industries, Inc.