




# TM 31-1.0-4.0 Thermoelectric Cooling Module

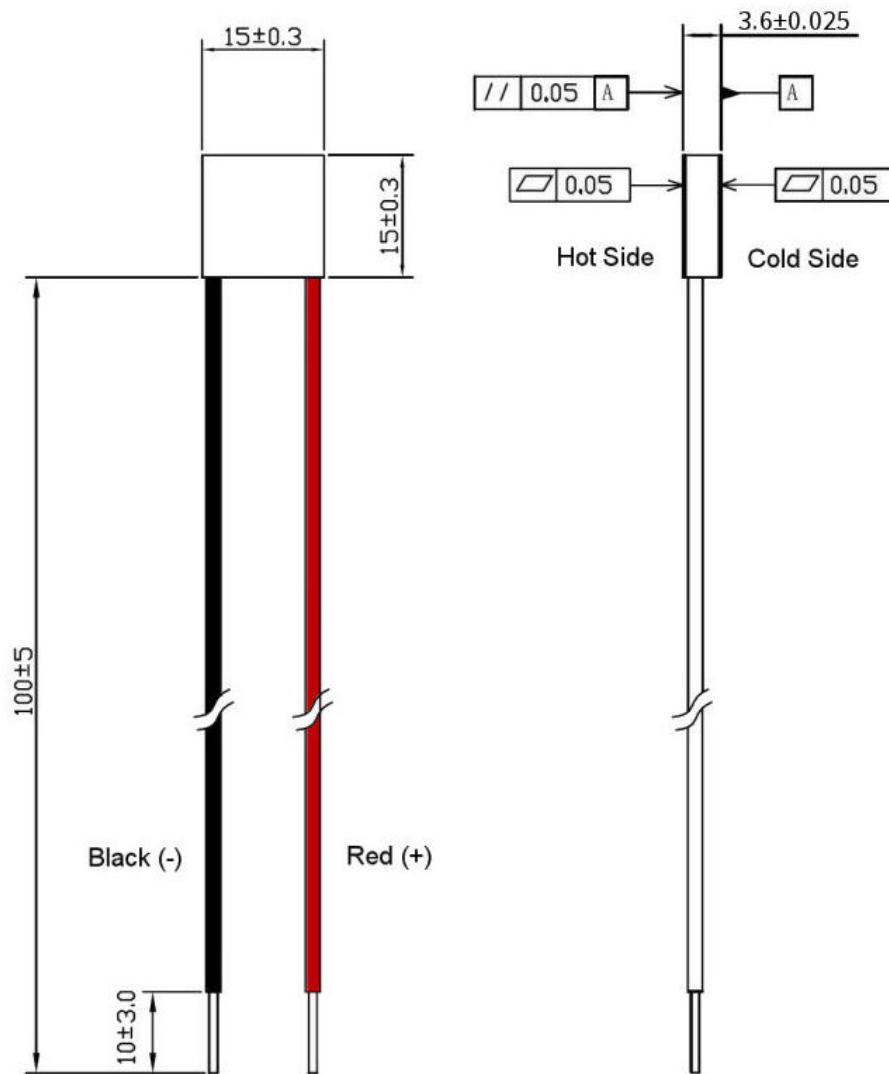

**$I_{\max} = 3.9$  Amps** ( $I_{\max}$  is the maximum current at  $\Delta T_{\max}$ )

**$V_{\max} = 3.8$  Volts** ( $V_{\max}$  is maximum voltage at  $\Delta T_{\max}$ )

**$Q_{c\max} = 8.6$  Watts** ( $Q_{c\max}$  is maximum cooling capacity at  $I_{\max}$ ,  $V_{\max}$  and  $\Delta T = 0$  °C)

**$\Delta T_{\max} = 70$  °C** ( $\Delta T_{\max}$  is maximum temperature difference at  $I_{\max}$ ,  $V_{\max}$  and  $Q_c = 0W$ )

[TM 31-1.0-4.0 Web Page Link](#)

ADVANCED THERMOELECTRIC

Toll-Free 1 (866) 665-5434

(603) 888-2467

[sales@electracool.com](mailto:sales@electracool.com)

Copyright © 2017 Pollock Industries, Inc.